



Galvanised Steel Top and Bottom Sheet with Vinyl Covering

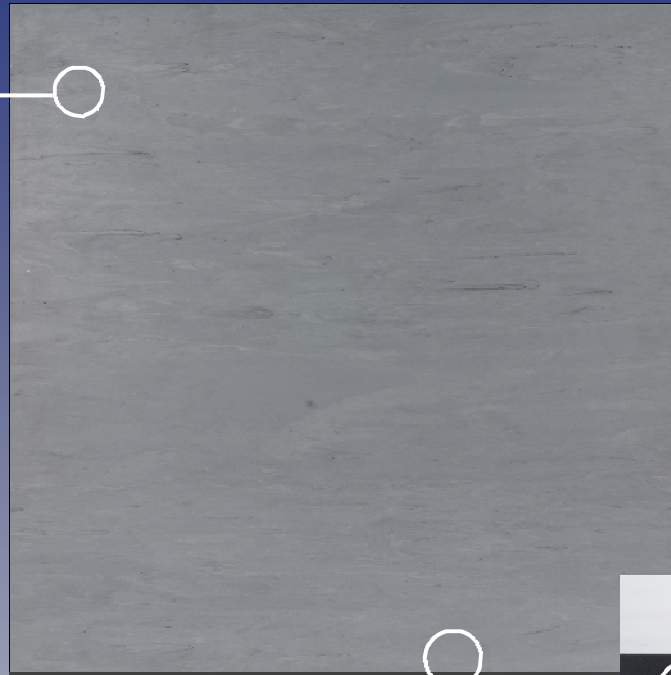

Full Depth PVC Edging



Classification	Ultimate Load	Safety Factor	Panel Thickness (Nominal)	System Weight (Typical)
3/A/3/2	≥8.0kN	3X	33mm	35kg/m ²

www.metaflex.co.uk

FLEX-BSEN3-V Panel

This panel consists of a sandwich construction with a high grade 30mm chipboard core with steel top and bottom sheet which is then covered with our standard Gerflor Mipolam EL7 Vinyl or other customer approved. This is all edged with a full depth PVC band creating a fully encapsulated panel to be loose laid with complete electrical continuity.

Finish

All of our edge banded panels can have a wide range of factory bonded finishes that include wood, ceramic tile and high pressure laminate & vinyl and any panels with a factory bonded finish can be perforated for air flow. Whatever your requirements, Metaflex will have the flooring solution to suit you.

Manufacture

All panels are manufactured in the UK, which allows us to offer total flexibility whilst maintaining the highest possible quality standard and ensures fast reaction and a reliable service. Materials used are sourced from high quality suppliers and use renewable, sustainable sources and suppliers wherever possible. We can also offer a bespoke service and specialise in replicating and reproducing existing raised floors.

Accessories

Accessories include ramps, steps, handrails, subfloor seal, fire barrier, grilles, upstands, perforated panels, air leakage control, bridging, stringers, service outlets, cavity barrier and lifting tools. FULL DETAILS AVAILABLE ON REQUEST

Metaflex Limited

Milltown Industrial Estate,
Warrenpoint, Co. Down,
Northern Ireland. BT34 3FN.

- ☎ NI (028) 4177 3604
- ☎ ROI (048) 4177 3604
- ☎ (028) 4177 3266
- ✉ info@metaflex.co.uk
- 🌐 www.metaflex.co.uk



For further information Call: (028) 4177 3604